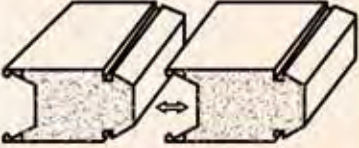
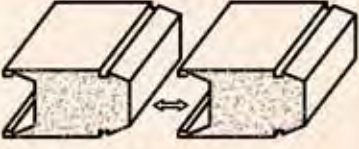
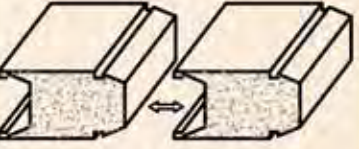
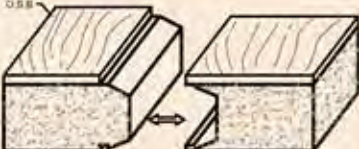




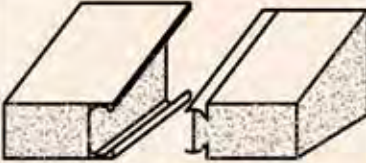
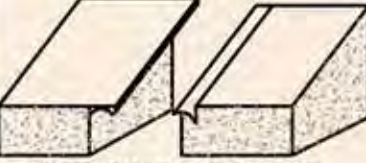
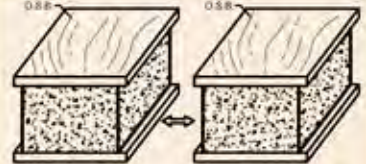
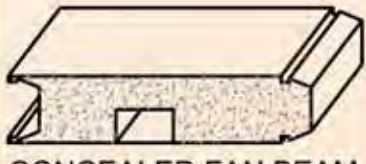

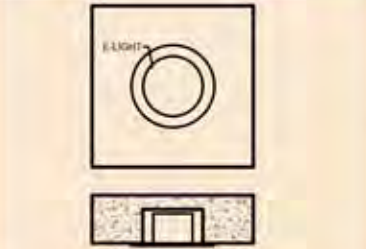
<b>ITEM</b>	<b>USE / DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>UNIVERSAL LOCK</b></p>	<p>Roll lock or horizontal lock. double sealant reservoir, reinforced locking edges and interlock foam for consistent thermal separation. Will easily unlock if necessary. Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.</p>	<p>4 Ft. width or 22-7/8", up to 40 Ft. lengths          .024 or .032 Alum. facings (.032 white only)          1lb or 2lb density polystyrene foam          3", 4", 6" &amp; 8" thickness available</p>
 <p><b>ELITE INTERLOCK</b></p>	<p>Roll lock design with positive lock feature. Interlock foam for consistent thermal separation.</p> <p>Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.</p>	<p>4 Ft. width or 22-7/8", up to 40 Ft. lengths          .024 or .032 Alum. facings (.032 white only)          1lb or 2lb density polystyrene foam          3", 4", 6" &amp; 8" thickness available</p>
 <p><b>ELITE PANELOCK</b></p>	<p>Horizontal lock design with positive lock feature. Interlock foam for consistent thermal separation.</p> <p>Aluminum facings both sides with polystyrene foam core. Fully engineered and product approved.</p>	<p>4 Ft. width or 22-7/8", up to 24 Ft. lengths          .024 Alum. facings          1lb or 2lb density polystyrene foam          3", 4", 6" &amp; 8" thickness available</p>
 <p><b>ELITE SHINGLE</b></p>	<p>Specifically designed for the use of shingles or tile. OSB top facing with aluminum bottom facing allows for the application of conventional roof treatments. Must maintain a minimum slope of 2-1/2" per foot and properly dried in. Fully engineered and product approved.</p>	<p>4 Ft. width only and lengths up to 12 Ft.          .024 or .032 Alum. facings (.032 white only)          1lb or 2lb density polystyrene foam          4" &amp; 6" thickness available</p>

**ALUMINUM FACING COLOR AND FINISH OPTIONS:**

- \* White, Almond, Ivory, Clay, Silver Stucco Embossed
- \* White Tough Stucco Embossed
- \* White and Almond Cedar Woodgrain













<b>ITEM</b>	<b>USE / DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>ELITE DOUBLE-FACED TAPERED</b></p>	<p>Panel used when sidewalls can not be tapered for positive slope. Offers customers preferred flat ceiling and great R-Value.</p>	<p><b>WIDTHS:</b> 4Ft. only  <b>MIN. LENGTHS:</b> 8 Ft.  <b>MAX. LENGTHS:</b> 24 Ft.  <b>COLOR SELECTION:</b>          See note on page 2          Starting Thickness 2",          1/4" per ft. slope only</p>
 <p><b>ELITE SINGLE FACED TAPERED</b></p>	<p>Single layer application. Adds positive slope, concealed clip system for attachment, adds R-Value, eliminates removal of old roof.</p>	<p><b>WIDTHS:</b> 4 Ft. only  <b>MIN. LENGTHS:</b> Up to 24 FT.  <b>COLOR SELECTION:</b>          See note below          Starting Thickness 2"          1/4" or 1/8" per ft. slope</p>
 <p><b>ADVANTECH (OSB) DECK PANEL</b></p>	<p>Panel used when a raised floor application is required. E.P.S. core is recessed to accept 2x4 &amp; 2x6 lumber as connectors and perimeter finish. Specify standard panel or end panel.          4-7/8" &amp; 6-7/8" thick</p>	<p><b>WIDTHS:</b> 4 Ft. or 2 Ft.  <b>MIN. LENGTHS:</b> 8 Ft. - Max. 24'  <b>FACING OPTIONS:</b>          5/8" AdvanTech OSB</p>
 <p><b>CONCEALED FAN BEAM</b></p>	<p>Available in any panel thickness when the attachment of a fan or light is required. 2"x3" concealment beam is used as a conduit and for connection integrity. Available with any style panel.</p>	<p><b>WIDTHS:</b> 4 FT. or half width 22 7/8"  <b>LENGTHS:</b> Up to 40 FT.  <b>COLOR SELECTION:</b>          See note on page 2</p>
 <p><b>IN PANEL SKYLIGHT</b></p>	<p>When skylights are desired. Panel is completely prepared, skylight and attachment kit are included. Available in 3", 4" and 6" Elite panel. Double Domed Poly Carbonate.          Also available Poly-lite curbed with 1/2" insulated glass.</p>	<p><b>STANDARD SIZE:</b> 2'x4', 2'x2', 2'x6' and Special Orders  <b>COLOR:</b>          Earthtone  <b>FRAME COLOR:</b>          White, Bronze Min. panel length using skylight 6'</p>
 <p><b>E-LITE</b></p>	<p>LED lighting system that can be easily installed into 2x3 conduit / fan support.          * Core drill 2-5/8" hole through fan beam          * Attach wires to electrical source          * Slide light into hole and the patented wedge design snaps light into place</p>	<p>10w LED equal to 65w incad.          16%kw usage of electricty          25,000hrs of use vs 1,200hrs           Cover Dia: 3"          Power: 10 watts          Dimmable: Yes</p>











# ELITE ALUMINUM CORPORATION

4650 Lyons Technology Parkway • Coconut Creek, FL 33073  
 954.949.3200 • fax 954.949.3201 www.elitealuminum.com • info@elitealuminum.com

# ROOF PARTS CATALOG

<b>ITEM</b>	<b>USE / DESCRIPTION</b>	<b>SPEC'S</b>
 <b>ELITE DOUBLE GUTTER</b>	Protects core material from possible damage. Allows moisture that may intrude the system to exit through a secondary gutter. Two piece hinge design for easy installation.	<b>WIDTHS:</b> 3" & 4" systems <b>LENGTHS:</b> 24 Ft. <b>COLOR SELECTIONS:</b> White, Bronze, Splice Available
 <b>ELITE "D" FASCIA</b>	Used only with Double Gutter. Protects core material from any possible damage. Blends aesthetically with double gutter.	<b>WIDTHS:</b> 3" & 4" systems <b>LENGTHS:</b> 25 Ft. <b>COLOR SELECTION:</b> White or Bronze
 <b>ELITE "E" GUTTER</b>	Protects core material from possible damage. Allows flush finish on bottom side of roof.	<b>WIDTHS:</b> 3" systems <b>LENGTHS:</b> 24 Ft. <b>COLOR SELECTIONS:</b> White, Bronze, Ivory, Almond & Clay Splice Available for 6" system (White only)
 <b>ELITE "E" FASCIA</b>	Used only with "E" Gutter. Protects core material from any possible damage. Blends aesthetically with "E" gutter.	<b>WIDTHS:</b> 3" systems <b>LENGTHS:</b> 25 Ft. <b>COLOR SELECTION:</b> White, Bronze, Almond, Ivory or Clay for 6" system (White only)
 <b>NATURESCAPE 3/4" GUTTER</b>	Protects core material from possible damage. Can be used with 3" or 4" thick roof panels. Also allows for screening to eliminate debris.	<b>WIDTHS:</b> For 3" and 4" systems <b>LENGTHS:</b> 24 Ft. <b>COLOR SELECTION:</b> White, Almond or Bronze
 <b>NATURESCAPE 3/4" FASCIA</b>	Used only with NatureScape gutter. Protects core material from possible damage. Blends aesthetically with NatureScape gutter.	<b>WIDTHS:</b> For 3" and 4" systems <b>LENGTHS:</b> 25 Ft. <b>COLOR SELECTION:</b> White, Almond or Bronze
 <b>DRIP EDGE FASCIA</b>	Extruded trim and closure for Elite Roof System, duplicates fascia and roof edge residential profile. Allows for the application of "K" style residential gutter.	<b>WIDTHS:</b> for 3", 4" & 6" systems <b>LENGTHS:</b> 25 Ft. <b>COLOR SELECTION:</b> White, Almond, Bronze, Clay, Ivory (3" sys. only)
 <b>WALL HEADER</b>	Channel used for attaching Elite panels to existing wall or fascia. Thermally broken for a consistent separation between inside and outside surfaces. Pre-pitched for roof slope.	<b>LENGTHS:</b> 24 Ft. <b>COLOR SELECTIONS:</b> 3" White, Almond, Ivory, Bronze or Clay 4" & 6" White, Almond, Clay



<b>ITEM</b>	<b>USE / DESCRIPTION</b>	<b>SPEC'S</b>
 <p><b>ADJUSTABLE RIDGE BEAM</b></p>	<p>Used to support load and connect panels at the ridge. Designed to achieve slopes of 1/12 to 7/12. Thermally broken for consistent separation between outside and inside surfaces.</p>	<p><b>WIDTHS:</b> 3", 4" &amp; 6" Roof system</p> <p><b>LENGTHS:</b> 24 Ft.</p> <p><b>COLOR SELECTION:</b> White and Almond</p>
 <p><b>GABLE RIDGE CONNECTOR</b></p>	<p>Used as panel connector on gabled roof. Designed for 3/12 slope. Thermally broken for a consistent separation between outside and inside surfaces.</p>	<p><b>WIDTHS:</b> 3" System only</p> <p><b>LENGTHS:</b> 24 Ft.</p> <p><b>COLOR SELECTION:</b> White</p>
 <p><b>CONCEALED CLIP SYSTEM</b></p>	<p>Used on the single faced tapered panel system for attaching to an existing deck. Extruded aluminum. 2 piece system for easy adjustment to various panel thicknesses.</p>	<p>Set includes top &amp; bottom clip. Use bottom clip for end panels. Mill Finish</p>
 <p><b>LAG BOLT W/ DRILL TIP &amp; NEOPRENE WASHER</b></p>	<p>Used for anchoring uplift on the Elite roof systems. Used at bearing and side walls.</p>	<p>4-7/8", 5-7/8" &amp; 7-7/8" lengths Lags 100 ct. Box3</p>
 <p><b>PL PREMIUM ADHESIVE</b></p>	<p>Used for the application of shingles and other type roof materials to the Elite roof.</p>	<p>11 oz. cartridge 12 per carton</p>
 <p><b>ADHESIVE SEALANT-THERMO PLASTIC</b></p>	<p>Used for sealing seams and attachment connections. Industrial grade, adhesive quality.</p>	<p>11 oz. cartridge 12 per carton White, Almond &amp; Clear</p>
 <p><b>SOLAR SEAL SEALANT</b></p>	<p>Used for sealing and other attachment connections. Industrial grade, adhesive quality, will not harm foam core.</p>	<p>11 oz. cartridge 12 per carton White only</p>
 <p><b>PEEL &amp; SEAL 250 W/ POWER BOND 4"</b></p>	<p>Used for sealing seams and other attachment connections. <b>Peel &amp; Seal:</b> Aluminum top facing on a mineral fiber substrate.</p>	<p><b>PEEL &amp; SEAL:</b> 50 Ft. Roll - 4" Widths White &amp; Almond embossed</p>