



[DBPR HOME](#) | [ABOUT DBPR](#) | [DBPR DIVISIONS](#) | [CONTACT DBPR](#)

[BCIS Home](#) | [Log In](#) | [User Registration](#) | [Hot Topics](#) | [Submit Surcharge](#) | [Stats & Facts](#) | [Publications](#) | [Contact Us](#) | [BCIS Site Map](#) | [Links](#) | [Search](#)



Product Approval
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

OFFICE OF THE SECRETARY

FL #	FL7561-R6
Application Type	Revision
Code Version	2020
Application Status	Approved
Comments	
Archived	<input type="checkbox"/>
Product Manufacturer	Elite Aluminum Corporation
Address/Phone/Email	4650 Lyons Technology Parkway Coconut Creek, FL 33073 (954) 949-3200 dk@dokimengineering.net
Authorized Signature	Do Kim dk@dokimengineering.net
Technical Representative	Bruce Peacock
Address/Phone/Email	4650 Lyons Technology Parkway Coconut Creek, FL 33073 (954) 949-3200 bpeacock@elitealuminum.com
Quality Assurance Representative	
Address/Phone/Email	
Category	Roofing
Subcategory	Products Introduced as a Result of New Technology
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received
Florida Engineer or Architect Name who developed the Evaluation Report	Do Kim, P.E.
Florida License	PE-49497
Quality Assurance Entity	QAI Laboratories
Quality Assurance Contract Expiration Date	01/31/2025
Validated By	James L. Buckner, P.E. @ CBUCK Engineering <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received
Certificate of Independence	FL7561_R6_COI_certificate_of_independence.pdf
Referenced Standard and Year (of Standard)	
Equivalence of Product Standards	

Certified By

Sections from the Code

1709.2

Product Approval Method

Method 2 Option B

Date Submitted

06/15/2022

Date Validated

06/15/2022

Date Pending FBC Approval

06/21/2022

Date Approved

08/09/2022

Summary of Products

FL #	Model, Number or Name	Description
7561.1	Aluminum/Aluminum Composite Panels	3"/4"/6"x0.024"x1lb EPS Composite Panel, 3"/4"/6"x0.032x1lb EPS Composite Panel, 3"/4"/6"x0.024"x2lb EPS Composite Panel, 3"/4"/6"x0.030"x2lb EPS Composite Panel,
<p>Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +80/-80 Other: In HVHZ, not to be used in structures considered living areas per FBC Section 1616 unless impact protection is provided. See installation drawing for nominal allowable design pressures and spans.</p>		<p>Installation Instructions FL7561_R6_II_2020 FBC-Elite Aluminum Corp Install Dwg-REV1.pdf Verified By: Do Kim, P.E. PE 49497 Created by Independent Third Party: Yes</p> <p>Evaluation Reports FL7561_R6_AE_FL_7561 Evaluation Report-2020 FBC-Rev1.pdf Created by Independent Third Party: Yes</p>

[Back](#) [Next](#)

[Contact Us](#) :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. Copyright 2007-2013 State of Florida. :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).

Product Approval Accepts:




DO KIM & ASSOCIATES, LLC
CONSULTING STRUCTURAL ENGINEERS

Florida Board of Engineers Certificate of Authorization No. 26887

Certificate of Independence

Do Kim and Associates, LLC and Do Kim, P.E. do not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named in the accompanying Florida Product Approval.



This item has been digitally signed and sealed by Do Y. Kim on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Do Kim, P.E.
FL #49497

ELITE PANEL SPAN TABLES:

1. Net allowable loads are permitted to be multiplied by 1.67 to derive ultimate loads (psf).

ELITE ALUMINUM PANELS ARE LABELED WITH A FL7561 LABEL TO ENSURE BUILDING INSPECTOR THAT THE INSULATED PANELS INSTALLED ARE APPROVED FOR USE IN THE STATE OF FLORIDA.

3" x 0.024 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	16.17	15.76	15.03	14.10
20	13.44	13.44	12.22	10.35
30	10.78	10.78	9.41	6.60
40	9.22	9.22	6.60	2.85
50	8.17	8.17	3.79	-
60	7.40	6.39	0.98	-
70	6.81	4.51	-	-
80	6.33	2.64	-	-

3" x 0.032 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	17.50	17.50	16.91	15.96
20	16.64	15.96	14.06	12.16
30	15.17	14.06	11.21	8.36
40	13.69	12.16	8.36	4.56
50	12.22	10.26	5.51	0.76
60	10.75	8.36	2.66	-
70	9.27	6.46	-	-
80	7.80	4.56	-	-

3" x 0.024 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	19.33	18.95	18.31	17.66
20	18.11	17.66	16.36	15.06
30	16.80	16.36	14.41	12.46
40	15.49	15.06	12.46	9.86
50	14.18	13.76	10.51	7.26
60	12.87	12.46	8.57	4.67
70	11.57	11.16	6.62	2.07
80	10.26	9.86	4.67	-

3" x 0.030 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	20.11	20.03	19.42	18.81
20	19.02	18.81	17.58	16.35
30	17.93	17.58	15.73	13.89
40	16.83	16.35	13.89	11.43
50	15.74	15.12	12.05	8.97
60	14.64	13.89	10.21	6.52
70	13.55	12.66	8.36	4.06
80	12.46	11.43	6.52	1.60

4" x 0.024 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	19.00	19.00	17.17	16.53
20	15.01	15.01	15.01	13.95
30	12.50	12.50	12.50	11.38
40	10.97	10.97	10.97	8.80
50	9.92	9.92	9.44	6.22
60	9.13	9.13	7.51	3.64
70	8.52	8.52	5.58	1.07
80	8.02	8.02	3.64	-

4" x 0.032 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	20.50	20.50	20.11	19.24
20	19.61	19.24	17.49	15.74
30	18.17	17.49	14.87	12.24
40	16.72	15.74	12.24	8.74
50	15.28	13.99	9.62	5.25
60	13.84	12.24	7.00	1.75
70	12.40	10.49	4.38	-
80	10.95	8.74	1.75	-

4" x 0.024 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	21.97	21.97	21.52	20.97
20	20.77	20.77	19.86	18.76
30	19.57	19.57	18.21	16.55
40	18.36	18.36	16.55	14.34
50	17.16	17.16	14.89	12.13
60	15.96	15.96	13.24	9.93
70	14.75	14.75	11.58	7.72
80	13.55	13.55	9.93	5.51

4" x 0.030 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	24.17	24.17	24.17	24.17
20	23.64	23.64	23.41	23.11
30	22.57	22.57	21.90	21.01
40	21.51	21.51	20.39	18.91
50	20.45	20.45	18.88	16.80
60	19.39	19.39	17.37	14.70
70	18.33	18.33	15.86	12.59
80	17.26	17.26	14.35	10.49

6" x 0.024 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	23.00	21.24	21.47	20.85
20	18.06	18.06	18.06	18.06
30	15.13	15.13	15.13	15.13
40	13.34	13.34	13.34	13.34
50	12.10	12.10	12.10	10.91
60	11.17	11.17	11.17	8.43
70	10.44	10.44	10.30	5.95
80	9.85	9.85	8.43	3.47

6" x 0.032 x 1 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	24.00	24.00	24.00	23.42
20	23.34	23.21	21.82	20.22
30	22.10	21.63	19.42	17.02
40	20.86	20.05	17.02	13.82
50	19.62	18.47	14.62	10.62
60	18.38	16.89	12.22	7.42
70	17.14	15.30	9.82	4.22
80	15.91	13.72	7.42	1.02

6" x 0.024 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)


NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	23.93	23.93	23.88	23.60
20	23.20	23.20	23.03	22.46
30	22.47	22.47	22.18	21.33
40	21.75	21.75	21.33	20.20
50	21.02	21.02	20.49	19.07
60	20.29	20.29	19.64	17.94
70	19.57	19.57	18.79	16.81
80	18.84	18.84	17.94	15.68

6" x 0.030 x 2 - LB EPS PANELS (ALLOWABLE CLEAR SPAN CHARTS)

NET ALLOWABLE LOAD (PSF) ¹	MAX. ALLOWABLE SPAN (FT)			
	L/80	L/120	L/180	L/240
10	24.00	24.00	24.00	23.84
20	23.65	23.65	23.34	22.84
30	22.94	22.94	22.59	21.85
40	22.23	22.23	21.85	20.85
50	21.53	21.53	21.10	19.86
60	20.82	20.82	20.36	18.87
70	20.11	20.11	19.61	17.87
80	19.40	19.40	18.87	16.88

GENERAL NOTES

- Composite panels shall be constructed using type 3003-H154 aluminum facings, 1 or 2 PCF ASTM C-578 carpenter brand EPS adhere to aluminum facings with Ashland Chemical 2020D ISO grip. Fabrication to be by Elite panel products only in accordance with approved fabrication methods.
- Elite roof panels maintain a UL 1715 (int) class 'B' (ext) rating and are NER-501 approved.
- This specification has been designed and shall be fabricated in accordance with the requirements of the Florida Building Code 7th Edition (FBC), composite panels comply with Chapter 7 Section 720, Chapter 8 Section 803, Class A interior finish, and Chapter 26 Section 2603. All local building code amendments shall be adhered to as required.
- The designer shall determine by accepted engineering practice the allowable loads for site specific load conditions (including load combinations) using the data from the allowable load tables and spans in this approval.
- Deflection limits and allowable spans have been listed to meet FBC including the HVHZ. In HVHZ, this product shall be used in structures "not to be considered living areas" per Section 1616 unless impact resistance in accordance to the HVHZ requirements are met.
- Safety factor of 2.0 has been used to develop allowable loads and spans from testing in accordance to the Guidelines for Aluminum Structures Part 1 and conforms to the FBC Chapter 16 and 20.
- Testing has been conducted in accordance to ASTM E72: Strength Test of Panels for Building Construction.
- Reference test reports: HETI-05-1988, HETI-06-2104, HETI-06-2066, HETI-06-2105, HETI-06-2067, HETI-05-1002, HETI-06-2107, HETI-05-1987, HETI-06-2069, HETI-06-2070, HETI-06-2071, HETI-05-1994, HETI-05-1991, HETI-06-2072, HETI-06-2073, HETI-06-2074, HETI-05-1996, HETI-05-1989, HETI-05-1993, HETI-05-1985, HETI-05-1995, HETI-05-1990, HETI-05-1997, HETI-05-2037, HETI-05-2029, HETI-05-2039, HETI-05-2030, HETI-05-2041, HETI-05-2048, HETI-05-2036, HETI-05-2031, HETI-05-2038, HETI-05-2065, HETI-05-2040, HETI-05-2042.
- Linear interpolation shall be allowed for figures within the tables shown.
- Panels with fan beams shall be considered equivalent to similar panels without fan beams. Design professionals may include the strength of the fan beam to exceed shown figures as part of site-specific engineering.

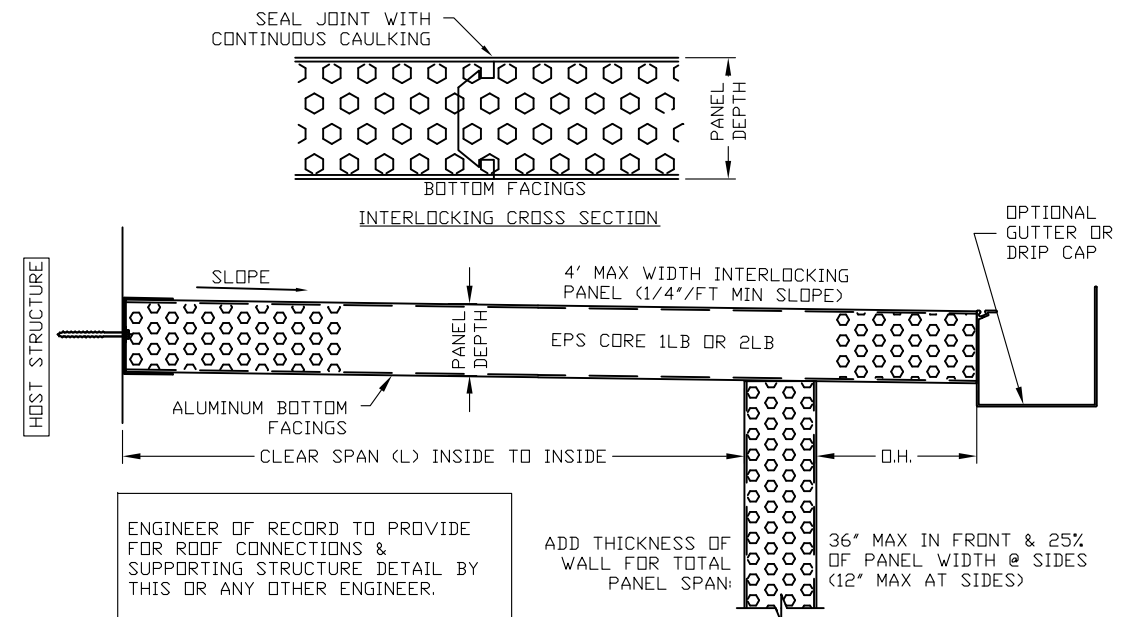

EPS ROOF PANEL/ SPAN DESCRIPTION

DO KIM
& ASSOCIATES, LLC


**CONSULTING
STRUCTURAL
ENGINEERS**

PO BOX 10039
Tampa, FL 33679
Tel: (813) 857-9955

Rev./Date	Description
8/12/2017	ISSUED FOR FBC 6th Edition PRODUCT APPROVAL
8/8/2020	ISSUED FOR FBC 7th Edition PRODUCT APPROVAL
6/15/2022	ADDED LABELING STATEMENT

Elite Aluminum Corporation
 4650 Lyons Technology Parkway
 Coconut Creek, FL 33073
**EPS FOAM CORE COMPOSITE PANELS
ALUMINUM/ALUMINUM SKIN
FLORIDA STATEWIDE PRODUCT APPROVAL**

DRAWN BY: DYK
CHECKED BY: DYK
SCALE: AS SHOWN
DATE: 2/19/12



This item has been digitally signed and sealed by Do Y. Kim on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Drawing No. - FL-1001

SHEET 1 OF 1

DO KIM & ASSOCIATES, LLC
CONSULTING STRUCTURAL ENGINEERS

Florida Board of Engineers Certificate of Authorization No. 26887

Product Evaluation Report

Date: June 15, 2022

Report No.: FL# 7561-R6

Product Category: Roofing

Product sub-category: Products Introduced as a Result of New Technology

Product Name: EPS Foam Core w/ Aluminum Skin Composite Panels


Manufacturer: Elite Aluminum Corporation
4650 Lyons Technology Parkway
Coconut Creek, FL 33073
Phone: 800-421-0682

Scope:

This product evaluation report issued by Do Kim and Associates, LLC and Do Kim, P.E. for Elite Aluminum Corporation is based on Florida Department of Business and Professional Regulation Rule 61G20-3.005 (2) Method 2 (b) of the State of Florida Product Approval. Re-evaluation of this product shall be required following pertinent Florida Building Code modifications or updates.

Do Kim and Associates, LLC and Do Kim, P.E. do not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the Florida Building Code, 7th Edition (FBC) and where pressure and deflection requirements, as determined by Chapter 16 of the Florida Building Code, do not exceed the design pressures as shown on the approval.



This item has been digitally signed and sealed by Do Y. Kim on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Do Kim, P.E.
FL #49497

Supporting Documents

1. Code Compliance
 - a. The product assembly described herein has demonstrated compliance with the Florida Building Code 7th Edition (FBC), Section 1709.2.
2. Drawings:
 - a. Drawing No. FL-1001 titled “EPS Foam Core Composite Panels”, Sheets 1 and 2 prepared by Do Kim and Associates, LLC., signed and sealed by Do Kim, P.E.
3. Testing
 - a. Testing per ASTM E72 as performed by Hurricane Engineering & Testing, Inc. (HETI), and reported in test report numbers HETI-05-1988, HETI-06-2104, HETI-06-2066, HETI-06-2105, HETI-06-2067, HETI-05-1002, HETI-06-2107, HETI-05-1987, HETI-06-2069, HETI-06-2070, HETI-06-2071, HETI-05-1994, HETI-05-1991, HETI-06-2072, HETI-06-2073, HETI-06-2074, HETI-05-1996, HETI-05-1989, HETI-05-1993, HETI-05-1985, HETI-05-1995, HETI-05-1990, HETI-05-1997, HETI-05-2037, HETI-05-2029, HETI-05-2039, HETI-05-2030, HETI-05-2041, HETI-05-2048, HETI-05-2036, HETI-05-2031, HETI-05-2038, HETI-05-2065, HETI-05-2040, HETI-05-2042.
4. Calculations
 - a. Panel performance engineering analysis for tested loading conditions have been prepared based on comparative and/or rational analysis, prepared, and submitted by Do Kim, P.E.
5. Other
 - a. Quality Assurance Agreement verified with Quality Auditing-Institute, LTD. (QAI Laboratories, LTD.) (FBC Organization #QUA7628).

Limitations and Condition of Use

1. Code Compliance
 - a. The product assembly described herein has demonstrated compliance with the Florida Building Code 7th Edition (FBC), Section 1709.2.
2. Large and small missile impact resistance has NOT been tested to or evaluated for in this approval. In HVHZ, this product shall be used in structures “not to be considered living areas” per Section 1616 unless impact resistance in accordance to the HVHZ requirements are met.
3. Each product listed above shall be installed in strict compliance with its respective Product Evaluation Document and site-specific engineering along with all components noted herein.
4. Use of each product shall be in strict accordance with its Product Approval Evaluation and Limitations of Use.
5. Composite panels shall be constructed using type 3003-H154 aluminum facings, 1 or 2 PCF ASTM C-578 Dyplast Products LLC brand EPS foam insulation (NOA No. 16-1129.05) adhere to aluminum facings with Ashland Chemical 2020D ISO grip. Fabrication to be by Elite panel products only in accordance with approved fabrication methods.
6. Elite roof panels maintain a UL 1715 (int) class ‘B’ (ext) rating and are NER-501 approved.
7. This specification has been designed and shall be fabricated in accordance with the requirements of the FBC, composite panels comply with Chapter 7 Section 720, Chapter 8 Section 803, Class A interior finish, and Chapter 26 Section 2603. All local building code amendments shall be adhered to as required.
8. The designer shall determine by accepted engineering practice the allowable loads for site specific load conditions (including load combinations) using the data from the allowable load tables and spans in this approval.
9. Deflection limits and allowable spans have been listed to meet FBC including the HVHZ (L/80 for spans $\leq 12'-0''$ and L/180 for spans $> 12'-0''$).
10. All supporting host structures shall be designed to resist all superimposed loads.
11. All components which are permanently installed shall be protected against corrosion, contamination, and other such damage.
12. Size and Span Limitations:
 - a. Composite panels shall be limited to those specific panels listed in the DWG. FL-1001.
 - b. Panel spans shall not exceed those listed in the tables of DWG. FL-1001.
13. **ELITE ALUMINUM PANELS ARE LABELED WITH A FL7561 LABEL TO ENSURE BUILDING INSPECTOR THAT THE INSULATED PANELS INSTALLED ARE APPROVED FOR USE IN THE STATE OF FLORIDA.**